

Ocla IP44

Downlight
Fixed









Diameter	115mm				168mm					
	Matt 90°				Matt 90°					
CCT	3000K	4000K	3000k	4000k	3000K	4000K	3000k	4000k	3000k	4000k
System Power	8.7W	8.7W	13.3W	13.3W	13.3W	13.3W	18.3W	18.3W	21.5W	21.5W
CRI	>80Ra				>80Ra					
System Lumen	782lm	815lm	1265lm	1303lm	1518lm	1527lm	2127lm	2170lm	2458lm	2488lm
System Efficacy	90lm/W	94lm/W	95lm/W	98lm/W	114lm/W	115lm/W	116lm/W	119lm/W	114lm/W	116lm/W
Driver	200mA	200mA	350mA	350mA	350mA	350mA	500mA	500mA	600mA	600mA
L+B values (50.000 hr)	L80B10 (50.000h)									



Article No.	Product Name	Color	CCT	CRI	System Lumen	System Power	System Efficacy	Reflector	Cutout size
2.11.8579 / 2.11.8583*	Ocla 115mm	White	3000K	>80Ra	782lm	8.7W	90lm/W	Matt 90°	Ø 100mm
2.11.8586 / 2.11.8589*	Ocla 115mm	White	4000K	>80Ra	815lm	8.7W	94lm/W	Matt 90°	Ø 100mm
2.11.8592 / 2.11.8595*	Ocla 115mm	White	3000K	>80Ra	1265lm	13.3W	95lm/W	Matt 90°	Ø 100mm
2.11.8598 / 2.11.8601*	Ocla 115mm	White	4000K	>80Ra	1310lm	13.3W	98lm/W	Matt 90°	Ø 100mm
2.11.8628 / 2.11.8631*	Ocla 168mm	White	3000K	>80Ra	1518lm	13.3W	114lm/W	Matt 90°	Ø 150mm
2.11.8634 / 2.11.8637*	Ocla 168mm	White	4000K	>80Ra	991lm	13.3W	115lm/W	Matt 90°	Ø 150mm
2.11.8640 / 2.11.8643*	Ocla 168mm	White	3000K	>80Ra	2127lm	18.3W	116lm/W	Matt 90°	Ø 150mm
2.11.8646 / 2.11.8649*	Ocla 168mm	White	4000K	>80Ra	2170lm	18.3W	119lm/W	Matt 90°	Ø 150mm
2.11.8652 / 2.11.8655*	Ocla 168mm	White	3000K	>80Ra	2458lm	21.5W	114lm/W	Matt 90°	Ø 150mm
2.11.8658 / 2.11.8661*	Ocla 168mm	White	4000K	>80Ra	2488lm	21.5W	116lm/W	Matt 90°	Ø 150mm


*Article No. with '1' indicates DALI dimmable driver is included.

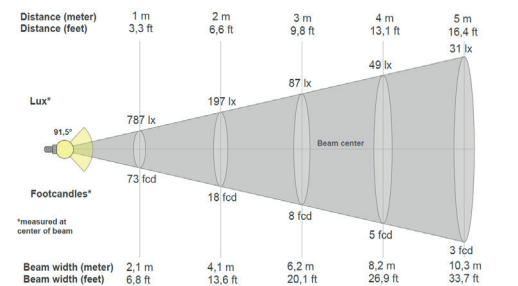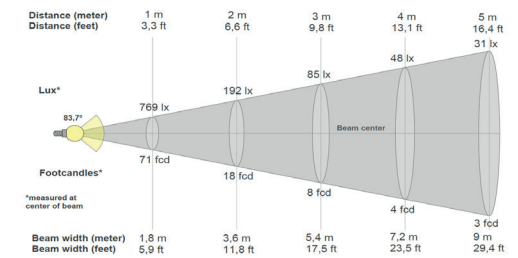


ALSO AVAILABLE

Description

Casambi dimmable



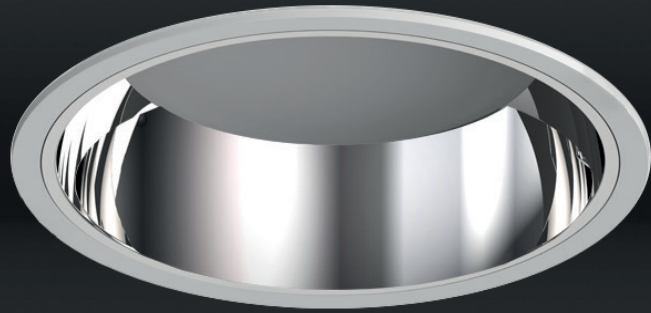

Delight Online



Ocla IP44

Downlight
Fixed



Also available
 Gloss 90° reflector
 White 90° reflector
 included

Diameter	183mm					
Reflector	Matt 90°					
CCT	3000K	4000K	3000k	4000k	3000K	4000K
System Power	13,3W	13,3W	18,3W	18,3W	21,5W	21,5W
CRI	>80Ra					
System Lumen	1552lm	1615lm	2207lm	2307lm	2498lm	2649lm
System Efficacy	117lm/W	121lm/W	121lm/W	126lm/W	116lm/W	123lm/W
Driver	350mA	350mA	500mA	500mA	600mA	600mA
L+B values (50.000 hr)	L80B10 (50.000h)					






Diameter	223mm							
Reflector	Matt 90°							
System Power	13,3W	13,3W	18,3W	18,3W	22,6W	22,6W	26,5W	26,5W
CRI	>80Ra							
CCT	3000K	4000K	3000K	4000K	3000K	4000K	3000K	4000K
System Lumen	1658lm	1696lm	2477lm	2392lm	2707lm	2759lm	3207lm	3373lm
System Efficacy	125lm/W	128lm/W	135lm/W	130lm/W	119lm/W	122lm/W	121lm/W	127lm/W
Driver	350mA	350mA	500mA	500mA	600mA	600mA	700mA	700mA
L+B values (50.000 hr)	L80B10 (50.000h)							

PRODUCT LIST




Article No.	Product Name	Color	CCT	CRI	System Lumen	System Power	System Efficacy	Reflector	Cutout size
2.11.8700 / 2.11.8703*	Ocla 183mm	White	3000K	>80Ra	1552lm	13.3W	117lm/W	Matt 90°	Ø 165mm
2.11.8706 / 2.11.8709*	Ocla 183mm	White	4000K	>80Ra	1615lm	13.3W	121lm/W	Matt 90°	Ø 165mm
2.11.8712 / 2.11.8715*	Ocla 183mm	White	3000K	>80Ra	2207lm	18.3W	121lm/W	Matt 90°	Ø 165mm
2.11.8718 / 2.11.8721*	Ocla 183mm	White	4000K	>80Ra	2498lm	18.3W	126lm/W	Matt 90°	Ø 165mm
2.11.8724 / 2.11.8727*	Ocla 183mm	White	3000K	>80Ra	2024lm	18.7W	116lm/W	Matt 90°	Ø 165mm
2.11.8730 / 2.11.8733*	Ocla 183mm	White	4000K	>80Ra	2171lm	19.2W	123lm/W	Matt 90°	Ø 165mm
2.11.8772 / 2.11.8775*	Ocla 223mm	White	3000K	>80Ra	1658lm	13.3W	125lm/W	Matt 90°	Ø 210mm
2.11.8778 / 2.11.8781*	Ocla 223mm	White	4000K	>80Ra	1696lm	13.3W	128lm/W	Matt 90°	Ø 210mm
2.11.8784 / 2.11.8787*	Ocla 223mm	White	3000K	>80Ra	2477lm	18.3W	135lm/W	Matt 90°	Ø 210mm
2.11.8790 / 2.11.8793*	Ocla 223mm	White	4000K	>80Ra	2392lm	18.3W	130lm/W	Matt 90°	Ø 210mm
2.11.8796 / 2.11.8799*	Ocla 223mm	White	3000K	>80Ra	2707lm	22.6W	119lm/W	Matt 90°	Ø 210mm
2.11.8802 / 2.11.8805*	Ocla 223mm	White	4000K	>80Ra	2759lm	22.6W	122lm/W	Matt 90°	Ø 210mm
2.11.8808 / 2.11.8811*	Ocla 223mm	White	3000K	>80Ra	3207lm	26.5W	121lm/W	Matt 90°	Ø 210mm
2.11.8814 / 2.11.8817*	Ocla 223mm	White	4000K	>80Ra	3273lm	26.5W	127lm/W	Matt 90°	Ø 210mm

*Article No. with * indicates DALI dimmable driver is included.

Ocla 183mm

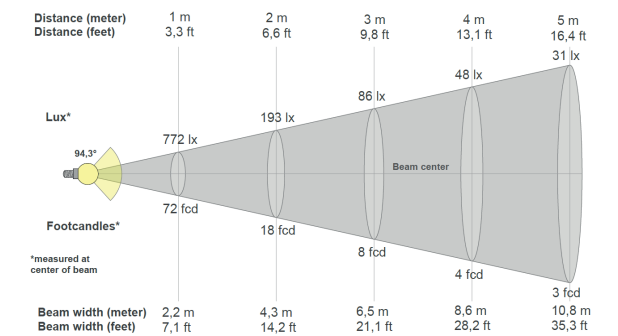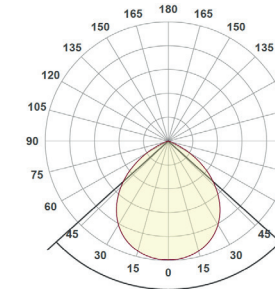

Ocla 223mm

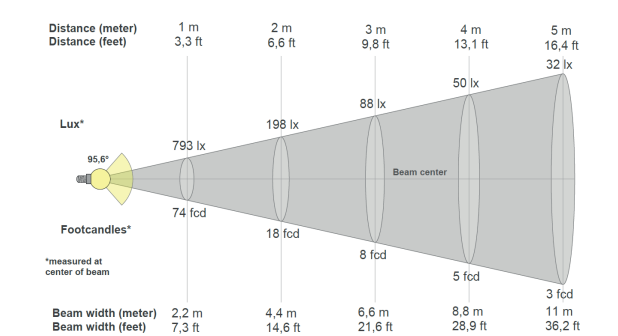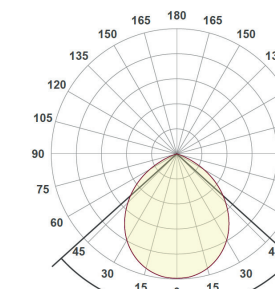

ALSO AVAILABLE

Description

Casambi dimmable

