



Lumiparts





---

The new Valo has an efficiency up to 120Lm/W, due to its multi-layered cover, it reaches a perfect uniformity. Our LED protection system maintains the quality of the LEDs. Avoiding yellowing, dark and/or overlit edges. The Valo is available in High Output UGR <22 and High Comfort UGR <19.

---

# VALO



Excellent uniformity

---


High Comfort Series UGR <19

---

High Output Series UGR >22

---

Efficiency up to +/- 120Lm/W

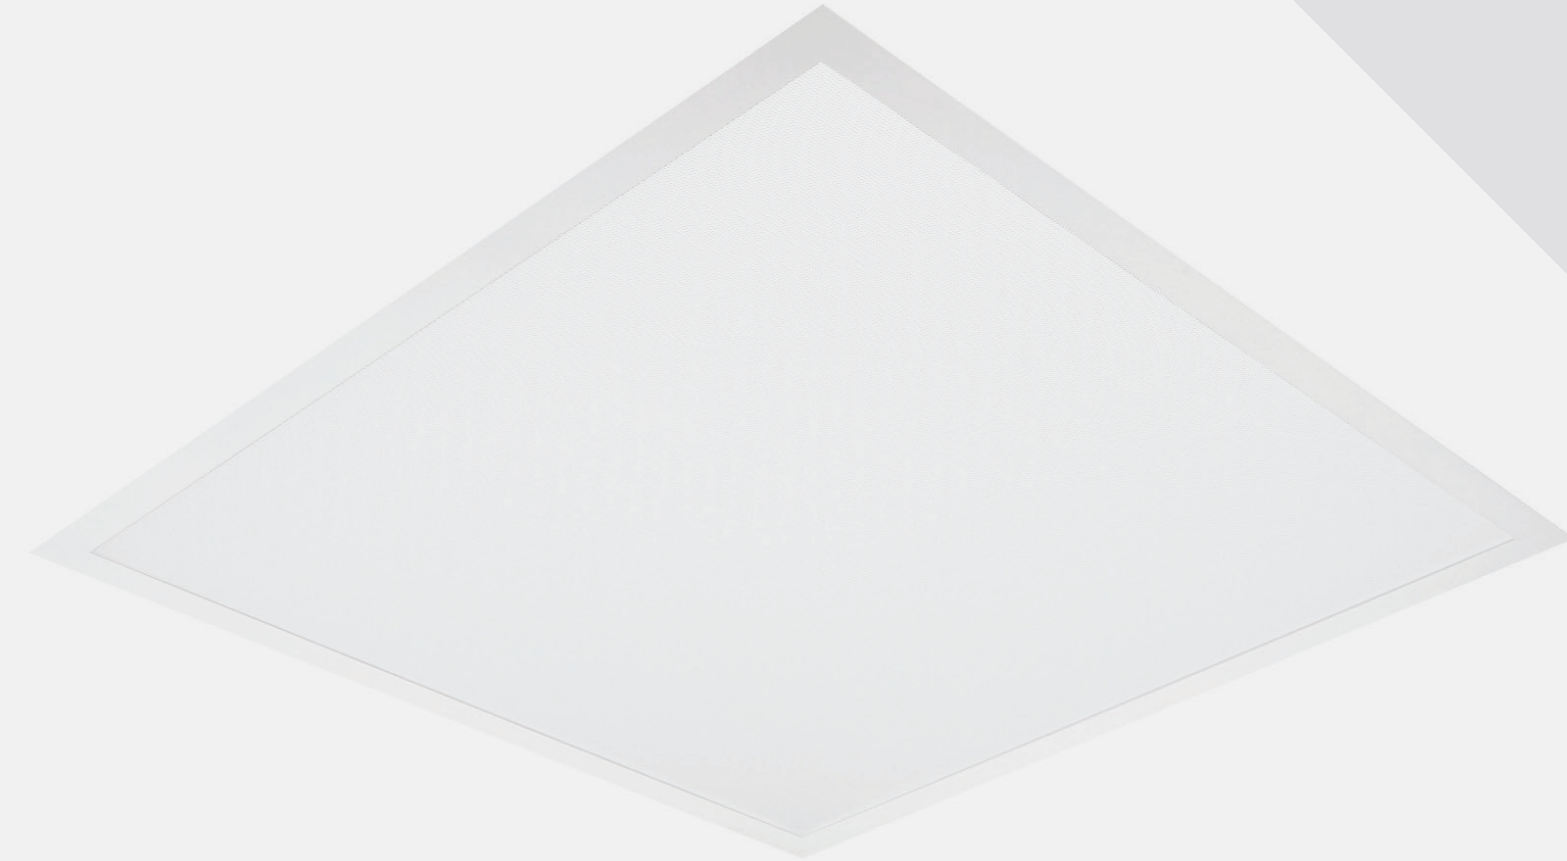






# Valo

Recessed Panel  
LED



| UGR                                      | High Output (UGR <22)                                                                                                       |         |                  |         |                   |         | High Comfort (UGR <19)                      |         |                      |         |                   |         |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|---------|------------------|---------|-------------------|---------|---------------------------------------------|---------|----------------------|---------|-------------------|---------|
| Size                                     | 595 x 595 x 10mm                                                                                                            |         | 622 x 622 x 10mm |         | 295 x 1195 x 10mm |         | 595 x 595 x 10mm                            |         | 622 x 622 x 10mm     |         | 295 x 1195 x 10mm |         |
| System Power                             | ± 25W - Non-Dimmable @ 700mA / ± 27W - DALI-Dimmable @ 700mA / ± 35W - Non-Dimmable @ 900mA / ± 35W - DALI-Dimmable @ 900mA |         |                  |         |                   |         |                                             |         |                      |         |                   |         |
| CRI                                      | >80Ra                                                                                                                       |         |                  |         |                   |         |                                             |         |                      |         |                   |         |
| CCT                                      | 3000K                                                                                                                       | 4000K   | 3000K            | 4000K   | 3000K             | 4000K   | 3000K                                       | 4000K   | 3000K                | 4000K   | 3000K             | 4000K   |
| System Lumen<br>Non-Dimmable @ 700mA     | 3015lm                                                                                                                      | 3224lm  | 2995lm           | 3240lm  | 3031lm            | 3149lm  | 2800lm                                      | 3119lm  | 2897lm               | 3188lm  | 2771lm            | 2997lm  |
| System Efficacy<br>Non-Dimmable @ 700mA  | 119lm/W                                                                                                                     | 127lm/W | 118lm/W          | 128lm/W | 121lm/W           | 125lm/W | 110lm/W                                     | 124lm/W | 114lm/W              | 126lm/W | 111lm/W           | 120lm/W |
| System Lumen<br>DALI-Dimmable @ 700mA    | 3100lm                                                                                                                      | 3301lm  | 3085lm           | 3342lm  | 3128lm            | 3249lm  | 2891lm                                      | 3219lm  | 2985lm               | 3283lm  | 2867lm            | 3094lm  |
| System Efficacy<br>DALI-Dimmable @ 700mA | 116lm/W                                                                                                                     | 125lm/W | 115lm/W          | 125lm/W | 118lm/W           | 123lm/W | 108lm/W                                     | 121lm/W | 112lm/W              | 123lm/W | 109lm/W           | 118lm/W |
| System Lumen<br>Non-Dimmable @ 900mA     | 4015lm                                                                                                                      | 4291lm  | 3959lm           | 4309lm  | 4015lm            | 4141lm  | 3609lm                                      | 4132lm  | 3843lm               | 4184lm  | 3687lm            | 3942lm  |
| System Efficacy<br>Non-Dimmable @ 900mA  | 115lm/W                                                                                                                     | 123lm/W | 114lm/W          | 125lm/W | 118lm/W           | 122lm/W | 112lm/W                                     | 120lm/W | 110lm/W              | 121lm/W | 108lm/W           | 115lm/W |
| System Lumen<br>DALI-Dimmable @ 900mA    | 3946lm                                                                                                                      | 4231lm  | 3934lm           | 4257lm  | 4000lm            | 4159lm  | 3585lm                                      | 4084lm  | 3784lm               | 4164lm  | 3637lm            | 3491lm  |
| System Efficacy<br>DALI-Dimmable @ 900mA | 113lm/W                                                                                                                     | 121lm/W | 113lm/W          | 123lm/W | 116lm/W           | 121lm/W | 103lm/W                                     | 118lm/W | 108lm/W              | 119lm/W | 106lm/W           | 115lm/W |
| Cover                                    | PMMA Light Guide Plate + Opal Diffuser                                                                                      |         |                  |         |                   |         | PMMA Light Guide Plate + Prismatic Diffuser |         |                      |         |                   |         |
| Driver                                   | Non-Dimmable or Dimmable Driver (included)                                                                                  |         |                  |         |                   |         |                                             |         |                      |         |                   |         |
|                                          |                                                                                                                             |         |                  |         |                   |         |                                             |         | Available on request |         |                   |         |

# Valo

## Recessed Panel LED

| PRODUCT LIST |                           |       |       |       |                     |                                        |                  |
|--------------|---------------------------|-------|-------|-------|---------------------|----------------------------------------|------------------|
| PANELS       |                           |       |       |       |                     |                                        |                  |
| Article No.  | Product Name              | Color | CCT   | CRI   | Driver              | Cover                                  | Size             |
| 2.17.3219    | Valo High Output (UGR<22) | White | 3000K | >80Ra | 700mA Non-dimmable  | PMMA Light Guide Plate + Opal Diffuser | 595 x 595 x 10mm |
| 2.17.3223    | Valo High Output (UGR<22) | White | 3000K | >80Ra | 700mA DALI-dimmable | PMMA Light Guide Plate + Opal Diffuser | 595 x 595 x 10mm |
| 2.17.3221    | Valo High Output (UGR<22) | White | 3000K | >80Ra | 900mA Non-dimmable  | PMMA Light Guide Plate + Opal Diffuser | 595 x 595 x 10mm |
| 2.17.3225    | Valo High Output (UGR<22) | White | 3000K | >80Ra | 900mA DALI-dimmable | PMMA Light Guide Plate + Opal Diffuser | 595 x 595 x 10mm |
| 2.17.3220    | Valo High Output (UGR<22) | White | 4000K | >80Ra | 700mA Non-dimmable  | PMMA Light Guide Plate + Opal Diffuser | 595 x 595 x 10mm |
| 2.17.3224    | Valo High Output (UGR<22) | White | 4000K | >80Ra | 700mA DALI-dimmable | PMMA Light Guide Plate + Opal Diffuser | 595 x 595 x 10mm |
| 2.17.3222    | Valo High Output (UGR<22) | White | 4000K | >80Ra | 900mA Non-dimmable  | PMMA Light Guide Plate + Opal Diffuser | 595 x 595 x 10mm |
| 2.17.3226    | Valo High Output (UGR<22) | White | 4000K | >80Ra | 900mA DALI-dimmable | PMMA Light Guide Plate + Opal Diffuser | 595 x 595 x 10mm |
| 2.17.3235    | Valo High Output (UGR<22) | White | 3000K | >80Ra | 700mA Non-dimmable  | PMMA Light Guide Plate + Opal Diffuser | 622 x 622 x 10mm |
| 2.17.3239    | Valo High Output (UGR<22) | White | 3000K | >80Ra | 700mA DALI-dimmable | PMMA Light Guide Plate + Opal Diffuser | 622 x 622 x 10mm |
| 2.17.3237    | Valo High Output (UGR<22) | White | 3000K | >80Ra | 900mA Non-dimmable  | PMMA Light Guide Plate + Opal Diffuser | 622 x 622 x 10mm |
| 2.17.3241    | Valo High Output (UGR<22) | White | 3000K | >80Ra | 900mA DALI-dimmable | PMMA Light Guide Plate + Opal Diffuser | 622 x 622 x 10mm |

| PRODUCT LIST |                           |       |       |       |                     |                                        |                   |
|--------------|---------------------------|-------|-------|-------|---------------------|----------------------------------------|-------------------|
| PANELS       |                           |       |       |       |                     |                                        |                   |
| Article No.  | Product Name              | Color | CCT   | CRI   | Driver              | Cover                                  | Size              |
| 2.17.3236    | Valo High Output (UGR<22) | White | 4000K | >80Ra | 700mA Non-dimmable  | PMMA Light Guide Plate + Opal Diffuser | 622 x 622 x 10mm  |
| 2.17.3240    | Valo High Output (UGR<22) | White | 4000K | >80Ra | 700mA DALI-dimmable | PMMA Light Guide Plate + Opal Diffuser | 622 x 622 x 10mm  |
| 2.17.3238    | Valo High Output (UGR<22) | White | 4000K | >80Ra | 900mA Non-dimmable  | PMMA Light Guide Plate + Opal Diffuser | 622 x 622 x 10mm  |
| 2.17.3242    | Valo High Output (UGR<22) | White | 4000K | >80Ra | 900mA DALI-dimmable | PMMA Light Guide Plate + Opal Diffuser | 622 x 622 x 10mm  |
| 2.17.3251    | Valo High Output (UGR<22) | White | 3000K | >80Ra | 700mA Non-dimmable  | PMMA Light Guide Plate + Opal Diffuser | 295 x 1195 x 10mm |
| 2.17.3255    | Valo High Output (UGR<22) | White | 3000K | >80Ra | 700mA DALI-dimmable | PMMA Light Guide Plate + Opal Diffuser | 295 x 1195 x 10mm |
| 2.17.3253    | Valo High Output (UGR<22) | White | 3000K | >80Ra | 900mA Non-dimmable  | PMMA Light Guide Plate + Opal Diffuser | 295 x 1195 x 10mm |
| 2.17.3257    | Valo High Output (UGR<22) | White | 3000K | >80Ra | 900mA DALI-dimmable | PMMA Light Guide Plate + Opal Diffuser | 295 x 1195 x 10mm |
| 2.17.3252    | Valo High Output (UGR<22) | White | 4000K | >80Ra | 700mA Non-dimmable  | PMMA Light Guide Plate + Opal Diffuser | 295 x 1195 x 10mm |
| 2.17.3256    | Valo High Output (UGR<22) | White | 4000K | >80Ra | 700mA DALI-dimmable | PMMA Light Guide Plate + Opal Diffuser | 295 x 1195 x 10mm |
| 2.17.3254    | Valo High Output (UGR<22) | White | 4000K | >80Ra | 900mA Non-dimmable  | PMMA Light Guide Plate + Opal Diffuser | 295 x 1195 x 10mm |
| 2.17.3258    | Valo High Output (UGR<22) | White | 4000K | >80Ra | 900mA DALI-dimmable | PMMA Light Guide Plate + Opal Diffuser | 295 x 1195 x 10mm |



# Valo

Recessed Panel  
LED

| PRODUCT LIST |                            |       |       |       |                     |                                             |                  |
|--------------|----------------------------|-------|-------|-------|---------------------|---------------------------------------------|------------------|
| PANELS       |                            |       |       |       |                     |                                             |                  |
| Article No.  | Product Name               | Color | CCT   | CRI   | Driver              | Cover                                       | Size             |
| 2.17.3211    | Valo High Comfort (UGR<19) | White | 3000K | >80Ra | 700mA Non-dimmable  | PMMA Light Guide Plate + Prismatic Diffuser | 595 x 595 x 10mm |
| 2.17.3215    | Valo High Comfort (UGR<19) | White | 3000K | >80Ra | 700mA DALI-dimmable | PMMA Light Guide Plate + Prismatic Diffuser | 595 x 595 x 10mm |
| 2.17.3213    | Valo High Comfort (UGR<19) | White | 3000K | >80Ra | 900mA Non-dimmable  | PMMA Light Guide Plate + Prismatic Diffuser | 595 x 595 x 10mm |
| 2.17.3217    | Valo High Comfort (UGR<19) | White | 3000K | >80Ra | 900mA DALI-dimmable | PMMA Light Guide Plate + Prismatic Diffuser | 595 x 595 x 10mm |
| 2.17.3212    | Valo High Comfort (UGR<19) | White | 4000K | >80Ra | 700mA Non-dimmable  | PMMA Light Guide Plate + Prismatic Diffuser | 595 x 595 x 10mm |
| 2.17.3216    | Valo High Comfort (UGR<19) | White | 4000K | >80Ra | 700mA DALI-dimmable | PMMA Light Guide Plate + Prismatic Diffuser | 595 x 595 x 10mm |
| 2.17.3214    | Valo High Comfort (UGR<19) | White | 4000K | >80Ra | 900mA Non-dimmable  | PMMA Light Guide Plate + Prismatic Diffuser | 595 x 595 x 10mm |
| 2.17.3218    | Valo High Comfort (UGR<19) | White | 4000K | >80Ra | 900mA DALI-dimmable | PMMA Light Guide Plate + Prismatic Diffuser | 595 x 595 x 10mm |
| 2.17.3228    | Valo High Comfort (UGR<19) | White | 4000K | >80Ra | 700mA Non-dimmable  | PMMA Light Guide Plate + Prismatic Diffuser | 622 x 622 x 10mm |
| 2.17.3232    | Valo High Comfort (UGR<19) | White | 4000K | >80Ra | 700mA DALI-dimmable | PMMA Light Guide Plate + Prismatic Diffuser | 622 x 622 x 10mm |
| 2.17.3230    | Valo High Comfort (UGR<19) | White | 4000K | >80Ra | 900mA Non-dimmable  | PMMA Light Guide Plate + Prismatic Diffuser | 622 x 622 x 10mm |
| 2.17.3234    | Valo High Comfort (UGR<19) | White | 4000K | >80Ra | 900mA DALI-dimmable | PMMA Light Guide Plate + Prismatic Diffuser | 622 x 622 x 10mm |



# Lumiparts

Nijverheidsweg 2  
2421 LR Nieuwkoop  
The Netherlands  
+31 (0)172 574 500  
[info@lumiparts.com](mailto:info@lumiparts.com)  
[www.lumiparts.com](http://www.lumiparts.com)

Lumiparts is part of the Lumiparts Group