

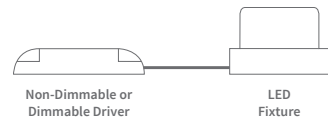
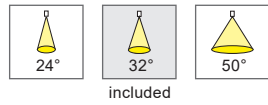



Focus V2

Spot Light
Fixed & Tiltable

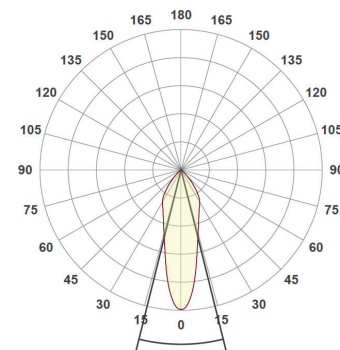

| | | | |
|-------------------------------|--|--------|--------|
| System Power | 15,1W | 15,4W | 15,2W |
| CRI | >90Ra | | |
| CCT | 2700K | 3000K | 4000K |
| System Lumen | 1153lm | 1193lm | 1292lm |
| System Efficacy | 76lm/W | 77lm/W | 85lm/W |
| LOR | Up to 90% | | |
| Driver | Non-Dimmable or Dimmable Driver (included) | | |
| L+B values (50.000 hr) | L80B10 (50.000h) | | |

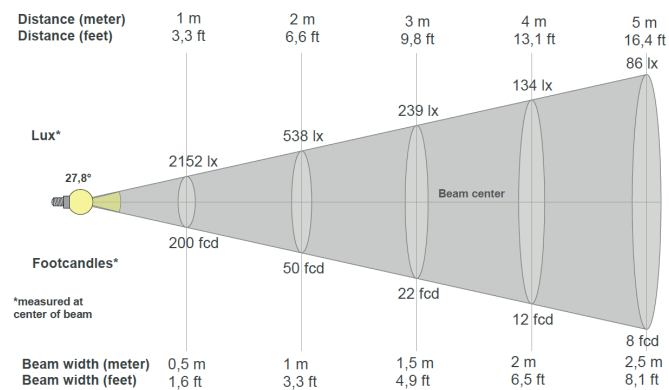


PRODUCT LIST

| Article No. | Product Name | Color | CCT | CRI | System Lumen | System Power | System Efficacy | Reflector | Cutout size |
|------------------------------------|----------------|--------------|-------|-------|--------------|--------------|-----------------|-----------|-------------|
| 2.11.4219 / 2.11.3988 ¹ | Focus V2 Fixed | Chrome | 2700K | >90Ra | 1153lm | 15,1W | 76lm/W | 32° | Ø 65mm |
| 2.11.4220 / 2.11.3989 ¹ | Focus V2 Fixed | Brushed Alu. | 2700K | >90Ra | 1153lm | 15,1W | 76lm/W | 32° | Ø 65mm |
| 2.11.4221 / 2.11.3990 ¹ | Focus V2 Fixed | Sandy White | 2700K | >90Ra | 1153lm | 15,1W | 76lm/W | 32° | Ø 65mm |
| 2.11.4222 / 2.11.3991 ¹ | Focus V2 Fixed | Black | 2700K | >90Ra | 1153lm | 15,1W | 76lm/W | 32° | Ø 65mm |
| 2.11.4223 / 2.11.3992 ¹ | Focus V2 Fixed | Chrome | 3000K | >90Ra | 1193lm | 15,4W | 77lm/W | 32° | Ø 65mm |
| 2.11.4224 / 2.11.3993 ¹ | Focus V2 Fixed | Brushed Alu. | 3000K | >90Ra | 1193lm | 15,4W | 77lm/W | 32° | Ø 65mm |
| 2.11.4225 / 2.11.3994 ¹ | Focus V2 Fixed | Sandy White | 3000K | >90Ra | 1193lm | 15,4W | 77lm/W | 32° | Ø 65mm |
| 2.11.4226 / 2.11.3995 ¹ | Focus V2 Fixed | Black | 3000K | >90Ra | 1193lm | 15,4W | 77lm/W | 32° | Ø 65mm |
| 2.11.4227 / 2.11.3996 ¹ | Focus V2 Fixed | Chrome | 4000K | >90Ra | 1292lm | 15,2W | 85lm/W | 32° | Ø 65mm |
| 2.11.4228 / 2.11.3997 ¹ | Focus V2 Fixed | Brushed Alu. | 4000K | >90Ra | 1292lm | 15,2W | 85lm/W | 32° | Ø 65mm |
| 2.11.4229 / 2.11.3998 ¹ | Focus V2 Fixed | Sandy White | 4000K | >90Ra | 1292lm | 15,2W | 85lm/W | 32° | Ø 65mm |
| 2.11.4230 / 2.11.3999 ¹ | Focus V2 Fixed | Black | 4000K | >90Ra | 1292lm | 15,2W | 85lm/W | 32° | Ø 65mm |

PRODUCT LIST

| Article No. | Product Name | Color | CCT | CRI | System Lumen | System Power | System Efficacy | Reflector | Cutout size |
|------------------------------------|--------------------|--------------|-------|-------|--------------|--------------|-----------------|-----------|-------------|
| 2.11.4231 / 2.11.4000 ¹ | Focus V2 Tilttable | Chrome | 2700K | >90Ra | 1153lm | 15,1W | 76lm/W | 32° | Ø 75mm |
| 2.11.4096 / 2.11.4001 ¹ | Focus V2 Tilttable | Brushed Alu. | 2700K | >90Ra | 1153lm | 15,1W | 76lm/W | 32° | Ø 75mm |
| 2.11.4097 / 2.11.4002 ¹ | Focus V2 Tilttable | Sandy White | 2700K | >90Ra | 1153lm | 15,1W | 76lm/W | 32° | Ø 75mm |
| 2.11.4098 / 2.11.4003 ¹ | Focus V2 Tilttable | Black | 2700K | >90Ra | 1153lm | 15,1W | 76lm/W | 32° | Ø 75mm |
| 2.11.4232 / 2.11.4004 ¹ | Focus V2 Tilttable | Chrome | 3000K | >90Ra | 1193lm | 15,4W | 77lm/W | 32° | Ø 75mm |
| 2.11.4099 / 2.11.4005 ¹ | Focus V2 Tilttable | Brushed Alu. | 3000K | >90Ra | 1193lm | 15,4W | 77lm/W | 32° | Ø 75mm |
| 2.11.4100 / 2.11.4006 ¹ | Focus V2 Tilttable | Sandy White | 3000K | >90Ra | 1193lm | 15,4W | 77lm/W | 32° | Ø 75mm |
| 2.11.4101 / 2.11.4007 ¹ | Focus V2 Tilttable | Black | 3000K | >90Ra | 1193lm | 15,4W | 77lm/W | 32° | Ø 75mm |
| 2.11.4233 / 2.11.4008 ¹ | Focus V2 Tilttable | Chrome | 4000K | >90Ra | 1292lm | 15,2W | 85lm/W | 32° | Ø 75mm |
| 2.11.4102 / 2.11.4009 ¹ | Focus V2 Tilttable | Brushed Alu. | 4000K | >90Ra | 1292lm | 15,2W | 85lm/W | 32° | Ø 75mm |
| 2.11.4234 / 2.11.4010 ¹ | Focus V2 Tilttable | Sandy White | 4000K | >90Ra | 1292lm | 15,2W | 85lm/W | 32° | Ø 75mm |
| 2.11.4103 / 2.11.4011 ¹ | Focus V2 Tilttable | Black | 4000K | >90Ra | 1292lm | 15,2W | 85lm/W | 32° | Ø 75mm |

¹Article No. with '1' indicates dimmable driver is included.

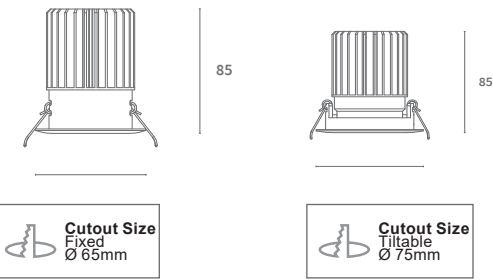

AVAILABLE DRIVERS

| Article No. | Description |
|-------------|-----------------------|
| ----- | DALI Dimmable driver |
| ----- | 1-10V Dimmable driver |