


# Casambi

Constant voltage

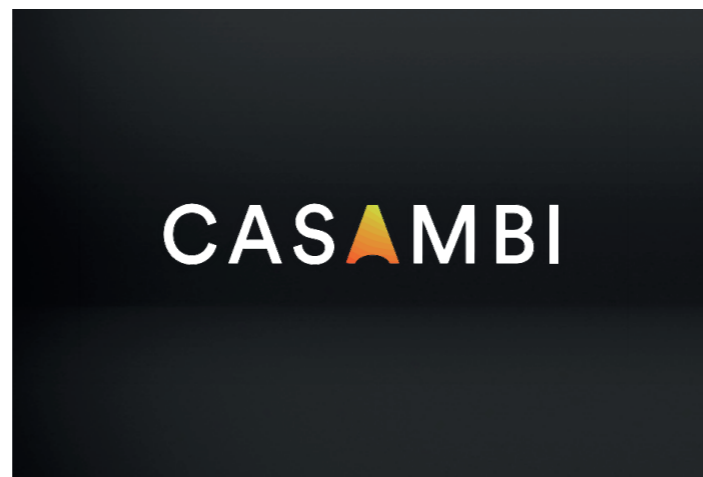

<b>Input Voltage</b>	230V AC
<b>Output Voltage</b>	24V
<b>Output Current</b>	-
<b>Output Power</b>	60-320W
<b>Power Factor</b>	>0,9
<b>Cooling</b>	Passive
<b>LED Connection</b>	Parallel connection

Casambi Interfase		Power	Voltage	Power factor	IP value	Length	Width	Height
<b>3.10.0806</b>	Casambi Dim Interface C-3100 1 Channel 230V for DALI & 0-10V Drivers	-	230V	0,93	IP20	56mm	22mm	36mm
<b>3.10.0807</b>	Casambi Dim Interface C-4027 4 Channels 12/24V max. 144W at 24V	max. 144W	12/24V	0,93	IP20	73mm	18mm	30mm
<b>3.10.0926</b>	Casambi Dim Interface CBU-TED 1 Channel 230V 150W for TRIAC drivers	max. 150W	230V	0,93	IP20	73mm	18mm	30mm

# DALI drivers

Constant voltage



<b>Input Voltage</b>	230V AC
<b>Output Voltage</b>	24V
<b>Output Current</b>	-
<b>Output Power</b>	60-320W
<b>Power Factor</b>	>0,9
<b>Cooling</b>	Passive
<b>LED Connection</b>	Parallel connection
<b>Dimmable with</b>	DALI

Article No. DALI Drivers		Power	Voltage	Power factor	IP value	Length	Width	Height
<b>3.10.0803</b>	LED Driver CV PT box	30W	24V	0,96	IP20	164mm	41mm	35mm
<b>3.10.0533</b>	LED Driver CV Powerbox	100W	24V	0,96	IP20	207mm	76mm	35mm
<b>3.10.0801</b>	LED Driver CV Powerbox	150W	24V	0,96	IP20	207mm	76mm	35mm
<b>3.10.0802</b>	LED Driver CV Powerbox	200W	24V	0,96	IP20	207mm	76mm	35mm
<b>3.10.0804</b>	LED Driver CV TW 2 Channels	100W	24V	0,96	IP20	207mm	76mm	35mm
<b>3.10.0733</b>	LED Driver CV Idis EL6	75W	24V	0,95	IP67	180mm	63mm	35,5mm
<b>3.10.0796</b>	LED Driver CV Idis EL6	100W	24V	0,95	IP67	199mm	63mm	35,5mm
<b>3.10.0542</b>	LED Driver CV Idis EL6	150W	24V	0,95	IP67	219mm	35,5mm	63mm
<b>3.10.0543</b>	LED Driver CV Idis EL6	240W	24V	0,95	IP67	244mm	71mm	37,5mm

DALI Interfase		Voltage	Power factor	IP value	Length	Width	Height
<b>3.10.0527</b>	DALI/0-10V/1-10V/Push Dim Interface 12/24V	12/24V	0,96	IP20	138mm	40mm	28,5mm

# Triac dimmable

Constant voltage




<b>Input Voltage</b>	230V AC
<b>Output Voltage</b>	24V
<b>Output Current</b>	-
<b>Output Power</b>	60-320W
<b>Power Factor</b>	>0,9
<b>Cooling</b>	Passive
<b>Dimmable with</b>	Triac
<b>LED Connection</b>	Parallel connection

Article No.		Power	Voltage	Power factor	IP value	Length	Width	Height
<b>3.10.0797</b>	LED Driver 24V DC 30W MDE60 phase cut dimmable	30W	24V	0,96	IP20	165mm	41mm	38mm
<b>3.10.0748</b>	LED Driver 24V DC 60W MDE60 phase cut dimmable	60W	24V	0,96	IP20	206mm	51mm	36mm

# RF single color/RGB/TW

Constant voltage

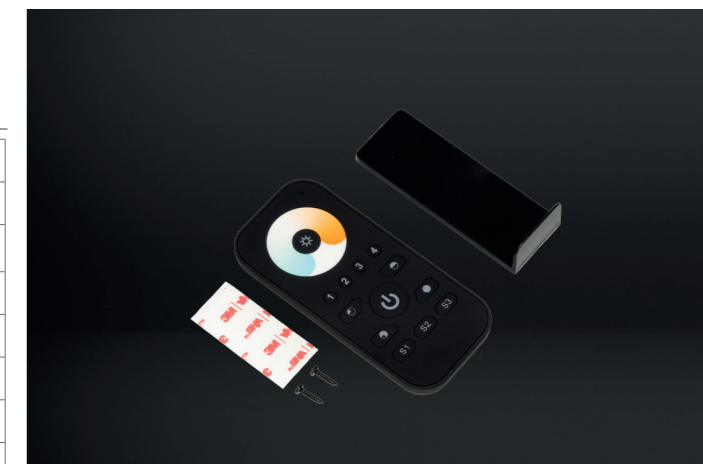

<b>Input Voltage</b>	12-36V DC
<b>Output Voltage</b>	12-36V DC
<b>Output Current</b>	-
<b>Output Power</b>	480W
<b>Power Factor</b>	>0,9
<b>Cooling</b>	Passive
<b>LED Connection</b>	Parallel Connection
<b>Dimmable with</b>	RF

Article No.	Moduled Controller	Length	Width	Height
<b>3.10.0422</b>	ModuLED Control, RF 12/24V 4 channel controller	46mm	178mm	18mm

Article No.	Remote Controllers	Length	Width	Height
<b>3.10.0423</b>	Remote control RF ModuLED DIM Control 5 zones	136,3mm	38,9mm	10,7mm
<b>3.10.0424</b>	Remote control RF ModuLED DIM Control 8 zones	131,4mm	43,8mm	24,3mm
<b>3.10.0810</b>	Remote control RF Slide ModuLED DIM Control 1 zone	141mm	35mm	141mm
<b>3.10.0811</b>	Remote control RF Slide ModuLED DIM Control 1 zone Tunable White	141mm	35mm	141mm
<b>3.10.0812</b>	Remote control RF ModuLED Control 4 zone Tunable White	120mm	55mm	120mm

Article No.	Wall controllers	Length	Width	Height
<b>3.10.0425</b>	Turn wall control RF ModuLED DIM Control 1 zone	86mm	86mm	29,1mm
<b>3.10.0427</b>	Touch wall control RF ModuLED DIM Control 1 zone	86mm	86mm	41mm
<b>3.10.0428</b>	Touch wall control RF ModuLED RGB Control 1 zone	86mm	86mm	41mm
<b>3.10.0809</b>	Touch wall control RF ModuLED DIM CCT Control	86mm	86mm	29,1mm