


# Oros

## Surface Mounted

### LED / Sensor



Product Information	
<b>Power</b>	16W
<b>CRI</b>	>80Ra
<b>CCT</b>	3000K
<b>Lumen</b>	1549lm
<b>Efficacy</b>	100lm/W
<b>Driver</b>	Non-Dimmable Driver (included)
<b>Cover</b>	Opal
Below function only applicable to Sensor version	
<b>Corridor Function</b>	Automatic dimming function Adjustable time, reach and intensity.
<b>Daylight Sensor</b>	2Lux/10Lux/50Lux threshold
<b>Motion Sensor</b>	Microwave Sensor
<b>Detection range</b>	6-12m (diameter), adjustable
<b>Hold time setting</b>	5 sec to 30 min, adjustable
<b>Standby period</b>	10 sec to 1 hour, adjustable
<b>Standby dimming level</b>	10% to 50%, adjustable

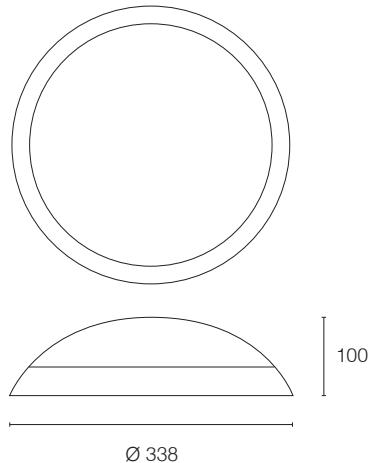

Product List	Article No.	Product Name	Color	Lumen	CCT	CRI	Cooling	Power	Material	Diameter
	2.16.0434	Oros, warm white	White	1549lm	3000K	>80Ra	Passive	16W	Polycarbonate	Ø 338mm
	2.16.0435	Oros Sensor, warm white	White	1549lm	3000K	>80Ra	Passive	16W	Polycarbonate	Ø 338mm