

Ril

Flood Light

80/150W



Up to

150W

Power

Up to


18000lm

Lumen

4000K

CCT



Product Information	System Power	90W	170W
	CRI	> 70Ra	
	CCT	4000K	
	Lumen	9600lm	18000lm
	LED Efficacy	120lm/W	120lm/W
	LOR	> 85%	
	Driver	Meanwell HLG Series (included)	
	Beam Angle	 60° x 60° Symmetric	 85° x 135° Asymmetric




System includes: fixture with integrated driver

Ril 150W 60° x 60°

H [m]		[lux]	Beam [Ø cm]	Field [Ø cm]
1		21715	90	180
2		5429	180	360
3		2413	280	530
4		1357	370	710
5		869	460	890

Beam (50%) Angle: 49°

Field (10%) Angle: 83°








Ril 150W 60° x 60°

H [m]		[lux]	V-Beam [Ø cm]	H-Beam [Ø cm]
1		3627	150	70
2		907	290	130
3		403	440	200
4		227	590	260
5		145	730	330

Beam (50%) Vertical: 72°
Beam (50%) Horizontal: 36°

Field (10%) Vertical: 91°
Field (10%) Horizontal: 142°

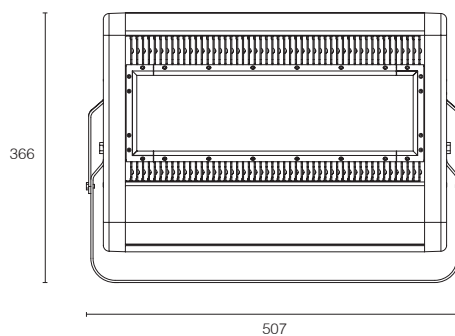

Article No.	Product Name	Color	Lumen	CCT	CRI	LED Power	Beam Angle
2.05.0256	LED Flood light Ril symmetric	Black	9600lm	4000K	>70Ra	80W	60° x 60°
2.05.0258	LED Flood light Ril asymmetric	Black	9600lm	4000K	>70Ra	80W	85° x 135°
2.05.0257	LED Flood light Ril symmetric	Black	18000lm	4000K	>70Ra	150W	60° x 60°
2.05.0259	LED Flood light Ril asymmetric	Black	18000lm	4000K	>70Ra	150W	85° x 135°