






Smooth V2

Spot Light
Square Tiltable

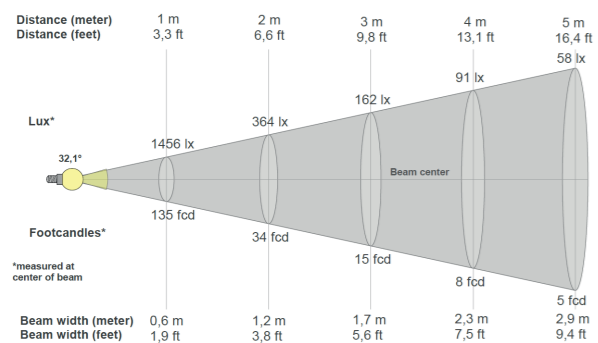


System Power	7.6W	
CRI	>90Ra	
CCT	2700K	3000K
System Lumen	542lm	603lm
System Efficacy	71lm/W	79lm/W
LOR	>70%	
Driver	Non-Dimmable or Dimmable Driver (included)	
L+B values (50.000 hr)	L80B10 (50.000h)	

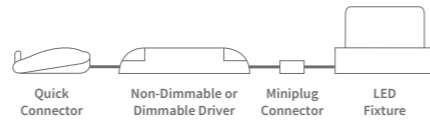

PRODUCT LIST

Article No.	Product Name	Color	CCT	CRI	System Lumen	System Power	System Efficacy	Reflector	Cutout size
2.11.3186 / 2.11.3187 ¹	Smooth V2 Square Tiltable	Aluminium	2700K	>90Ra	542lm	7.6W	71lm/W	38°	Ø 68mm
2.11.3189 / 2.11.3190 ¹	Smooth V2 Square Tiltable	Sandy White	2700K	>90Ra	542lm	7.6W	71lm/W	38°	Ø 68mm
2.11.3192 / 2.11.3193 ¹	Smooth V2 Square Tiltable	Aluminium	3000K	>90Ra	603lm	7.6W	79lm/W	38°	Ø 68mm
2.11.3195 / 2.11.3196 ¹	Smooth V2 Square Tiltable	Sandy White	3000K	>90Ra	6030lm	7.6W	79lm/W	38°	Ø 68mm

¹Article No. with ¹ indicates dimmable driver is included.



AVAILABLE DRIVERS

Article No.	Description
-----	DALI Dimmable driver
-----	1-10V Dimmable driver