




| PRODUCT LIST | | | | | | | | |
|------------------------------------|-------------------------|-------------|-----------|-------|-------|-----------|-----------|-------------|
| Article No. | Product Name | Color | LED Lumen | CCT | CRI | LED Power | Reflector | Cutout size |
| 2.11.1678 / 2.11.1679 ¹ | Smooth Adjustable Round | Aluminium | 930lm | 2700K | >90Ra | 12W | 38° | Ø 95mm |
| 2.11.1681 / 2.11.1682 ¹ | Smooth Adjustable Round | Sandy White | 930lm | 2700K | >90Ra | 12W | 38° | Ø 95mm |
| 2.11.1684 / 2.11.1685 ¹ | Smooth Adjustable Round | Aluminium | 1000lm | 3000K | >90Ra | 12W | 38° | Ø 95mm |
| 2.11.1687 / 2.11.1688 ¹ | Smooth Adjustable Round | Sandy White | 1000lm | 3000K | >90Ra | 12W | 38° | Ø 95mm |

¹ Article No. with ¹ indicates dimmable driver is included.



Cutout Size Adjustable Ø 95mm


Smooth

Spot Light

Adjustable Round




| | | |
|--------------|--|--------|
| System Power | 16W | |
| CRI | >90Ra | |
| CCT | 2700K | 3000K |
| LED Lumen | 930lm | 1000lm |
| LED Efficacy | 78lm/W | 83lm/W |
| LOR | >82% | |
| Driver | 350mA Non-Dimmable or Dimmable Driver (included) | |

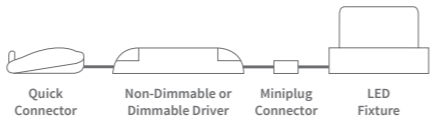

Smooth 16W 3000K

| H [m] | [lux] | Beam [Ø cm] | Field [Ø cm] |
|-------|-------|-------------|--------------|
| 1 | 1455 | 70 | 150 |
| 2 | 364 | 150 | 300 |
| 3 | 162 | 220 | 450 |
| 4 | 91 | 300 | 600 |
| 5 | 58 | 370 | 750 |

Beam (50%) Angle: 40° Field (10%) Angle: 74°



AVAILABLE DRIVERS

| Article No. | Description |
|-------------|-----------------------|
| ----- | DALI Dimmable driver |
| ----- | 1-10V Dimmable driver |