





Globo

Spot Light



Round Fixed & Tiltable




System Power	3W	
CRI	>80Ra	
CCT	2700K	3200K
System Lumen	93lm	97lm
System Efficacy	31lm/W	32lm/W
LOR	85%	
Driver	350mA/700mA Driver (not included)	
L+B values (50.000 hr)	L80B10 (50.000h)	

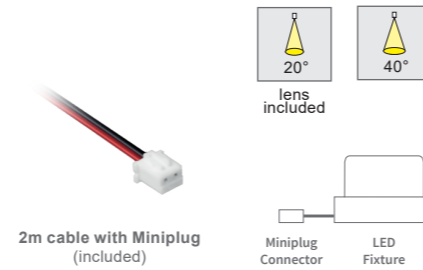

Article No.	Product Name	Color	CCT	CRI	System Lumen	System Power	System Efficacy	Lens	Cutout size
2.11.0637	Globo Fixed	Aluminium	2700K	>80Ra	93lm	Max. 3W	31lm/W	20°	Ø 35mm
2.11.0623	Globo Fixed	Aluminium	3200K	>80Ra	97lm	Max. 3W	31lm/W	20°	Ø 35mm
2.11.0638	Globo Tiltable	Aluminium	2700K	>80Ra	93lm	Max. 3W	32lm/W	20°	Ø 42mm
2.11.0624	Globo Tiltable	Aluminium	3200K	>80Ra	97lm	Max. 3W	32lm/W	20°	Ø 42mm

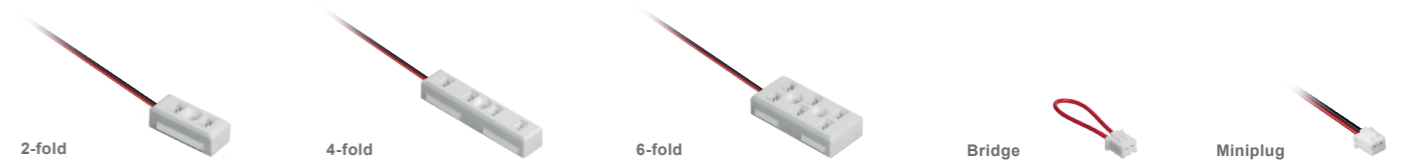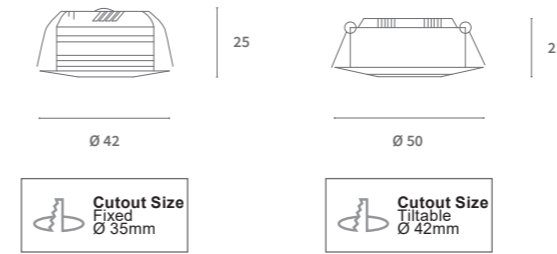

Article No.	PRODUCT NAME	CABLE LENGTH	CONNECTIONS	BRIDGE NUMBER	ENDS
3.01.0078	Miniplug Distributor	2m	2-fold	1x bridge	miniplug
3.01.0079	Miniplug Distributor	2m	2-fold	1x bridge	stripped cable
3.01.0080	Miniplug Distributor	4m	2-fold	1x bridge	miniplug
3.01.0081	Miniplug Distributor	2m	4-fold	2x bridge	miniplug
3.01.0082	Miniplug Distributor	2m	4-fold	2x bridge	stripped cable
3.01.0083	Miniplug Distributor	2m	6-fold	3x bridge	miniplug
3.01.0084	Miniplug Distributor	2m	6-fold	3x bridge	stripped cable

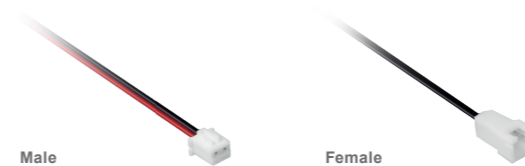

Article No.	Product Name	WIRE SIZE	LENGHT	COLOR	ENDS
5.03.0473	Miniplug Connection Cable	0.34mm²	2m	Black	Male / Female
5.03.0474	Miniplug Connection Cable	0.34mm²	5m	Black	Male / Female

Article No.	Product Name	MAX. LOAD	GLOBO	DIMMABLE
3.10.0434	LED Driver CC PLKE1090	350mA	1 - 7 Spots (1,2W)	Primary Dimmable
3.10.0879	LED Driver CC+CV PLKE3060	700mA	1 - 5 Spots (15W)	Primary Dimmable
3.10.0062	LED Driver PD309	700mA	3 - 9 Spots (3W)	-